




PLASTIC MOUNTING KIT FOR HAIL GUARD & PREVENT MODEL U FILTERS

MODEL # MOUNTKIT-SINGLE

MODEL # MOUNTKIT-DOUBLE

INSTALLATION INSTRUCTIONS

1. Holding filter in place on metal enclosure, mark grommet placements.
2. Center plastic mount clip vertically on each grommet mark and mark screw placements for each clip.
3. Pre-start each self-tapping screw hole with a punch for easy installation.
4. Attach each clip with 2 zip screws – moveable tab should be able to lock in downward position.
5. Install filter with grommet onto the clip's moveable tab outward position.
6. If applicable, Hail Guard is installed by pressing netting firmly onto upright clip tab. Filter with grommet is placed on upright clip tab. Close tab downward, locking in place. Tab opens & closes for easy filter cleaning removal.




MOUNT USING
(2) #6-3/4"
SELF
TAPPING
SCREWS

PRESS
NETTING
FIRMLY
ONTO
OPEN
CLIP



Moveable
tab opens
& closes
for secure
installation
& easy
removal
to clean.

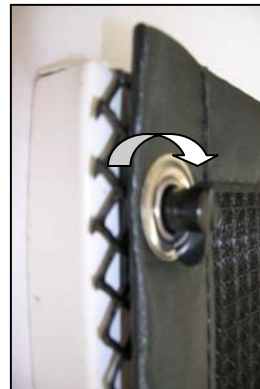

MOVEABLE TAB FACES
DOWNWARD TO LOCK

